


Roof — beneath the roof covering

Reflectiva Bronze/Silver between counter-batten and batten — installed from bottom to top, minimum 50 cm left open at the eaves and at the ridge

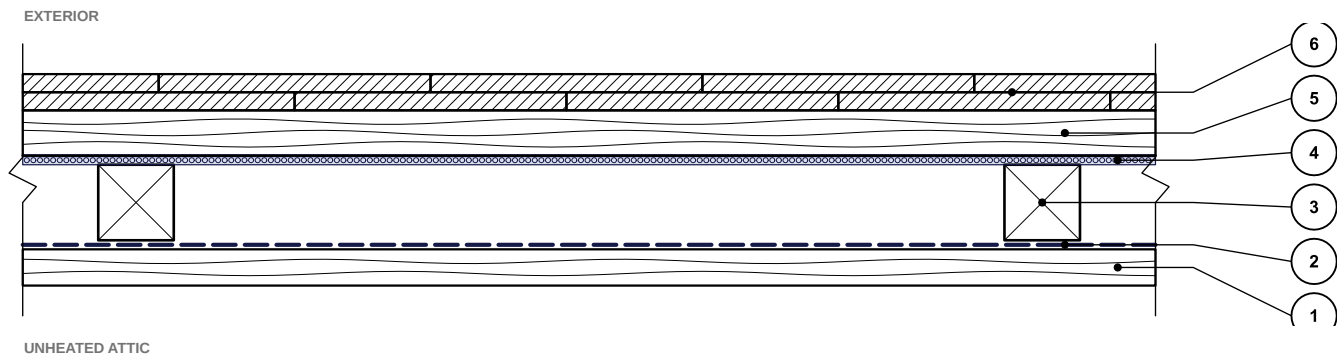

Build-up

- 1 Planed roof boarding 24 mm
- 2 Reflectiva Roof Pro or Roof Optim — anti-condensation membrane
- 3 Vertical batten 50 × 50 mm
- 4 Reflectiva Bronze — beneath the roof covering
- 5 Horizontal batten 30 × 50 mm, spacing 155 mm
- 6 Ceramic roof tile — scale pattern 180 × 380 mm

Note
Principle detail. It does not replace the execution design; thicknesses and fixings are determined by calculation for each project.

Mandatory for Bronze / Silver between batten and counter-batten: a minimum of 50 cm is left open at the bottom, at the eaves, and a minimum of 50 cm at the top, at the ridge, so that air can circulate and remove the condensation coming from the interior.



www.isolect.com

Designation	Code
Beneath the roof covering	ISO-ACO-02
Application	Scale
Roofs	1:5
Isolect products	Edition
Roof Pro/Optim · Bronze	10.2026